

SPECIALTY HOSES FOR TEMPERATURES +350°F TO +2000°F

Master-Clip Combo Hose

Material

- Hose wall: varied fabric combinations
- External helix: galvanized steel except for HT-2010

Applications

- Vehicle exhaust systems
- Dynometer testing
- Engine testing
- High temperature conveyance

Properties

- Refer to the spec sheet of combined hoses


Recommended Combinations

- Carflex 350/Carflex 570
- Master-Clip HT 750/Master-Clip HT 1200
- Master-Clip HT 1000/Master-Clip HT 1500
- Master-Clip HT 1200/Master-Clip HT 2010



Construction

1. External helix
2. Hose wall

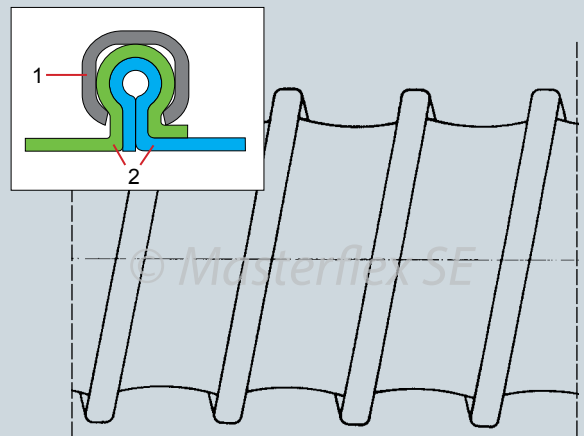

Temperature Range

- Exhaust temperature range dependent on hose combination*

*Hoses used for vehicle exhaust extraction, or operating near maximum temperature, should be used within a properly designed negative pressure fan system to avoid damaging the hose. Please consult your local representative for more details.

Master-Clip Combo Hose

Dia (in.)	Outer Dia (in.)	Negative (in. w.c.)	*Bending radius (in.)	Weight (lbs./ft.)	Product Code
4.0	Technical data dependent on hose combinations used.				
4.4					
4.8					
5.0					
5.2					
5.6					
6.0					
6.4					
6.8					
7.0					
7.2					
8.0					
8.6					
9.0					
10.0					
11.0					
12.0					
12.6					
13.0					
14.0					
15.0					
16.0					
18.0					
20.0					
22.0					
24.0					
28.0					
32.0					
36.0					

Standard Production

- Diameter: 4" to 36"
- Standard lengths: 25'

Available on Request

- Dependent on combination hose. Refer to the specific product spec sheet.

*Referring to the inner side of the elbow of hose.
 The above mentioned data refers to an average and ambient temperature of 68° F. Subject to technical changes and color variations. Please refer to technical data sheet when selecting hose.

Installation and connection possibilities



Clip-Grip hose clamp



hose connector



hose reducer, symmetrical

Masterduct, Inc.
 5235 Ted Street
 Houston, TX 77040 USA
 Tel. +1 713 462-5779
 Tel. +1 800 318-3300
 Fax +1 713 939-8441
 www.Masterduct.com

