

VULCANIZED PRODUCTS FOR TEMPERATURES UP TO +600°F

Master-SIL 2

Material

Hose wall: silicone-coated glass fabric, double-layered

Spiral: spring steel wire

Cord: glass fiber cord

Applications

- Chemicals industry
- Automotive industry
- Aircraft manufacturing
- Conveyance of air and gaseous media with high nominal and ambient temperatures with greater mechanical requirements
- Hot air hose for granulate dryer
- Machine and engine manufacturing
- Shipbuilding
- Plastic processing industry
- Waste incineration plants
- General engineering


Properties

- Highly flexible
- Lightweight
- Small bend radius
- Symmetrical bending
- Kink-proof
- Good chemical resistance
- Immovable vulcanized wall and spring steel spiral
- To maximize life of duct and exhaust system effectiveness, it is recommended to utilize a negative pressure exhaust system and introduce ambient air at the inlet



Construction

1. Spring steel spiral
2. Outer layer: silicone-coated glass fabric
3. Inner layer: silicone-coated glass fabric
4. Glass fiber cord

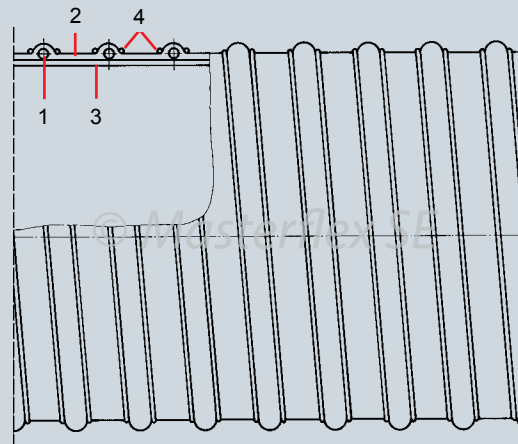

Temperature Range*

- -75°F up to +600°F

Chem. Resistance

See resistance table

*Hoses used for vehicle exhaust extraction, or operating near maximum temperature, must be used within a properly designed fan system to avoid damaging the hose.

Master-SIL 2

Dia (in.)	Positive (in. w.c.)	Negative (in. w.c.)	*Bending radius (in.)	Weight (lbs./ft.)	Product Code
1.00	1,125	260	0.60	0.15	686-026-800
1.25	1,125	260	0.63	0.17	686-032-800
1.50	1,045	240	0.72	0.21	686-038-800
1.75	1,045	224	0.84	0.23	686-044-800
2.00	1,045	208	0.96	0.24	686-050-800
2.25	1,005	196	1.12	0.29	686-057-800
2.50	965	184	1.24	0.33	686-063-800
3.00	884	172	1.52	0.39	686-075-800
3.50	804	160	1.76	0.46	686-090-800
4.00	764	140	2.08	0.51	686-100-800
4.50	643	116	2.28	0.59	686-115-800
5.00	563	104	2.52	0.65	686-125-800
6.00	482	68	3.00	0.80	686-150-800
7.00	402	48	3.56	0.97	686-175-800
8.00	281	36	4.00	1.09	686-200-800
10.00	201	28	6.00	1.40	686-250-800
12.00	121	16	8.40	1.71	686-300-800

*Referring to the inner side of the elbow of hose.

The above mentioned data refers to an average and ambient temperature of 68° F. Subject to technical changes and color variations. Please refer to technical data sheet when selecting hose.

Standard Production

- Diameter: 1" to 12"
- Color: red
- Standard lengths: 13' (1"-12" dia), 20' (2", 2.5", 3", 4", 5", 6", 8" dia)

Available on Request

- Special lengths
- Spliced lengths
- With spiral-free sleeves

Installation and connection possibilities



Hose clamp with worm-gear drive



Hose connector



Hose reducer, symmetrical

Masterduct, Inc.
5235 Ted Street
Houston, TX 77040 USA
Tel. +1 713 462-5779
Tel. +1 800 318-3300
Fax +1 713 939-8441
www.Masterduct.com

 **MASTERDUCT**
Connecting Values