

MEDIUM/HIGH TEMPERATURE HOSE FOR TEMPERATURES UP TO +850°F

Master-Clip HT 850

Material

Hose wall: high temperature silicone coated glass fabric
External helix: galvanized steel

Applications

- Vehicle exhaust systems (esp. Diesel engines)
- Suction plants
- Hot air
- Furnace construction
- Iron and steel works
- Engine manufacturing
- All normal exhaust extraction systems, such as, hose reel, slotted channels, above-floor and under-floor, suction extraction



Properties

- Flame-resistant
- Very high temperature resistance
- Highly flexible
- Extreme compressibility 1:6
- Small bend radius
- Improved vacuum resistance
- External steel helix protects against abrasion
- Suitable for continually flexing
- Does not emit airborne fibers
- Special clamping method guarantees high tensile strength between hose material and external helix
- To maximize life of duct and exhaust system effectiveness, it is recommended to utilize a negative pressure exhaust system and introduce ambient air at the inlet.



Construction

1. External helix
2. Hose wall: high temperature silicone coated glass fabric, asbestos free

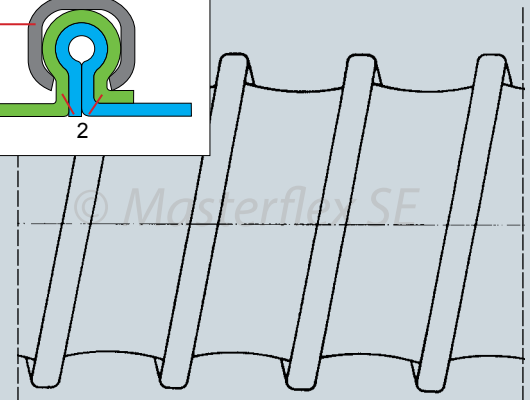

Temperature Range

- -5°F up to +850°F
- Intermittent to +950°F
- When used in exhaust gas systems, gas funnels should be used properly and enough fresh air should be utilized.

Master-Clip HT 850

Dia (in.)	Positive (in. w.c.)	Negative (in. w.c.)	*Bending radius (in.)	Weight (lbs./ft.)	Product Code
3.00	189	62	1.80	0.65	243-075-119
4.00	121	35	2.40	0.85	243-100-119
5.00	84	22	3.00	1.17	243-125-119
6.00	63	16	3.60	1.28	243-150-119
7.00	49	12	4.20	1.49	243-175-119
8.00	40	9	4.80	1.70	243-200-119
10.00	28	6	7.00	2.13	243-250-119
12.00	21	4	8.40	2.56	243-300-119
14.00	16	3	9.80	2.99	243-350-119
16.00	13	2	11.20	3.46	243-400-119

*Referring to the inner side of the elbow of hose.
The above mentioned data refers to an average and ambient temperature of 68° F. Subject to technical changes and color variations. Please refer to technical data sheet when selecting hose.

Standard Production

- Diameter: 3" to 16"
- Color: orange
- Standard lengths: 25'

Available on Request

- Special lengths
- Custom design with other pitches and helix sizes
- External helix also in stainless steel
- Special diameters metric

Installation and connection possibilities



Car-Grip hose clamp, screwable



Hose connector



Hose reducer, symmetrical

Masterduct, Inc.
5235 Ted Street
Houston, TX 77040
USA
Tel. +1 713 462-5779
Tel. +1 800 318-3300
Fax +1 713 939-8441
www.masterduct.com

 **MASTERDUCT**
Connecting Values